



FBHA S Series
Chip Ferrite Bead High Current Type
Size 0402




FEATURES

- Noise reduction solution for power line.
 - Compose of 80% ferrite and 20% metal for countermeasures against everything from general signals to high-speed signals.
Performs well even in signal lines where low direct current resistance is required.
 - AEC-Q200 qualified
Operating temperature: -55 to +150 °C(including self-temperature rise)
 - Quantity: 10000PCS
 -
 -
- Power line filter for body controls, and car multimedia etc.


APPLICATION

-

Dimensions: [mm]

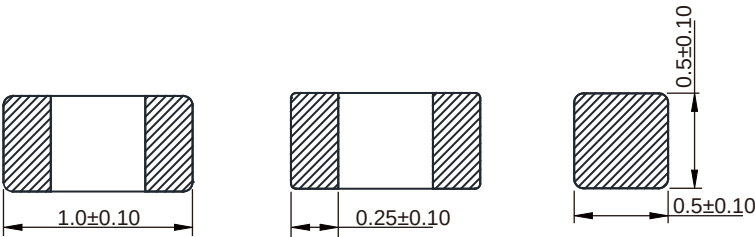

Land Pattern: [mm]








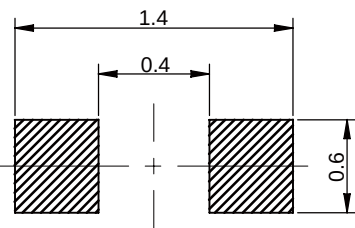


Electrical Properties:

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$



Typical Electrical Characteristics:

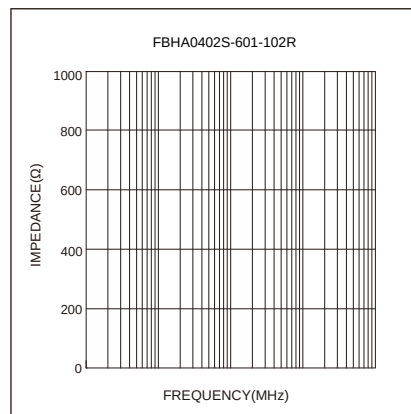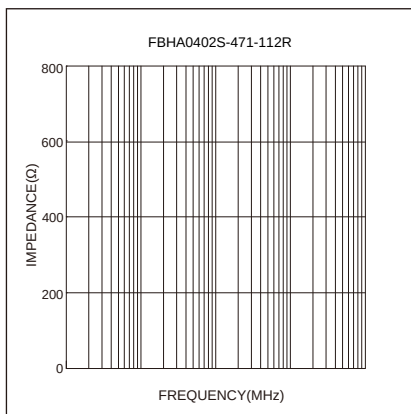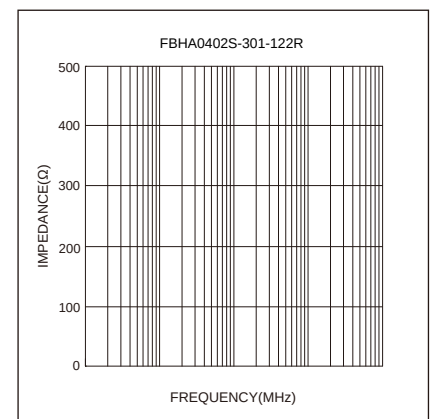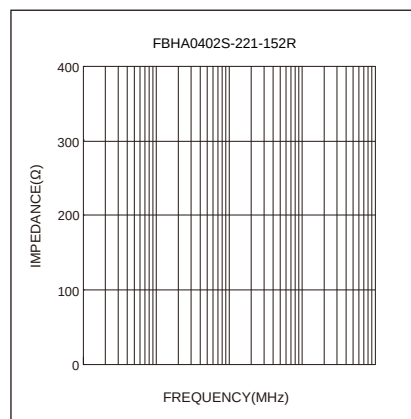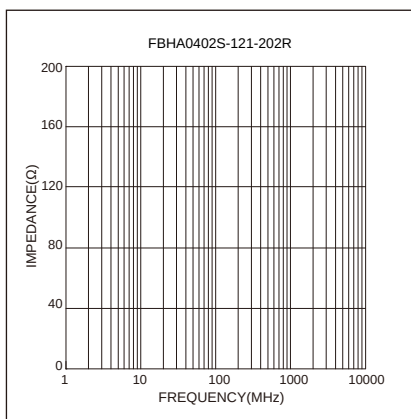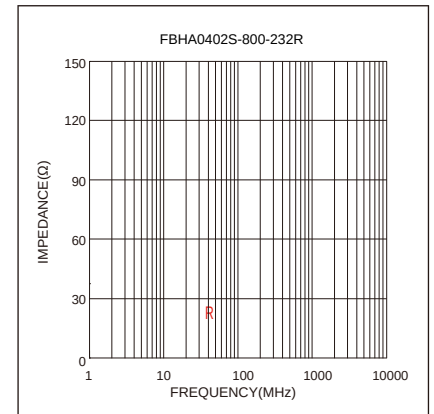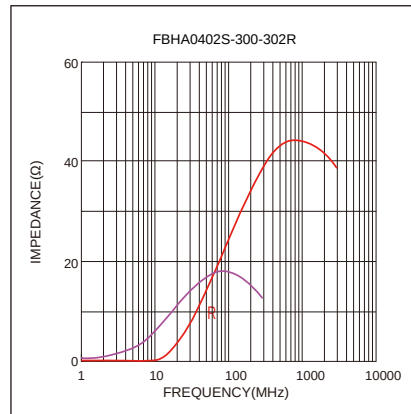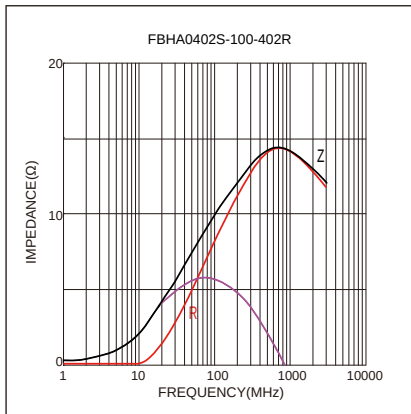



Soldering Reflow:

Preheat condition: 150 ~200℃ / 60~120 sec.

Allowed time above 217℃ : 60~150 sec.

Max temperature: 260℃ .

Allowed Reflow time: 3x max.


/

Packaging Information:

Tape Dimension:


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
FBHA0402S	0.62 ± 0.03	1.12 ± 0.03	1.5 ± 0.1	4.0 ± 0.1	2.0 ± 0.1	8.0 ± 0.3	0.60 ± 0.03	1.75 ± 0.1	0.60 ± 0.03

Peel force of top cover tape:

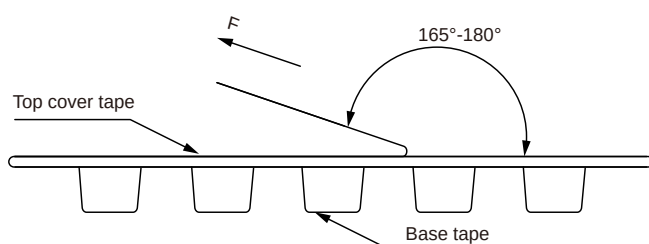


The peel force of top cover tape shall be between 0.14 to 0.58 N

Reel Dimension: [mm]

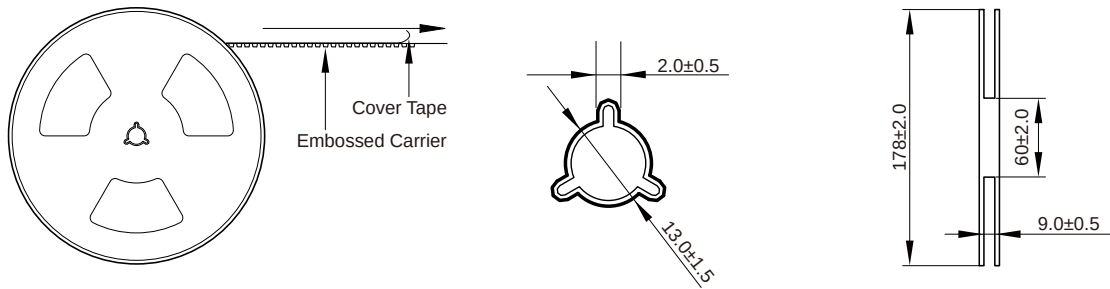

Packaging Quantity:



10000 Pcs/Reel

5 Reel /Inner box(50K Pcs)

8 Inner box/Carton box(400K Pcs)

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C , humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C .
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.