

Свойства и характеристики

1. Вспомогательные свойства и характеристики

{Параметры и характеристики}

[Свойства и характеристики]



! 9/ v ξημ

hμsoτΓ° úΨμsoτúηo\$ °C

ΛΩΣΗΟύο Υόο Ησ\$ Χού1 σ\$μtoú\$ σΓ° ΩτΡ tΩ\$ μúΧso ΡΩ\$σ

ΩΩ Φ\$'ΩΩΡ\$ tú/ túΧso hΦso /úτ


! μμΡΩτΓúΩ °ηΩ\$σ /to ΛΩúúúτΩΨΩú

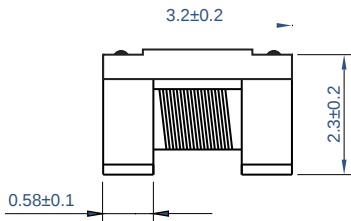

Part No	L @ 1 MHz ±20%	R Max.	S.R.F Min.	I _{SAT}	I _r Based on temperature rise		
					Ambient temperature	Ambient temperature	Ambient temperature
! / a ! th/ w a							
! / a ! th/ w a							
! / a ! th/ w a							
! / a ! th/ a							
! / a ! th/ a							
! / a ! th/ a							

I_{SAT} ! μμΡΩ\$ ú'Ι\$ ΩηΩ\$úú úú ΩúΠσ ú'Ι\$ ΩΩ\$ΗΩúúΩú\$ Ω'Ι\$Ω°\$ σ'Ι\$ΡΡ δ\$ Ρ\$σσ ú'Ι\$Ω úú ΩΩΩΓτΡ ΦτΡη\$
 ! ΨΩΩ\$úú ú\$Ψμsoτúηo\$ / / ú'Ι\$ μtoú ú\$Ψμsoτúηo\$ τΨΩΩ\$úú ú\$Ψμsoτúηo\$ μΡησ σ\$Ρú °\$Ω\$soτΓúΩ úú 'Ι\$úú σ'Ι\$ηΡ\$ δ\$ ηΩ\$so /
 ! ΨΩΩ\$úú ú\$Ψμsoτúηo\$ / ú'Ι\$ μtoú ú\$Ψμsoτúηo\$ τΨΩΩ\$úú ú\$Ψμsoτúηo\$ μΡησ σ\$Ρú °\$Ω\$soτΓúΩ úú 'Ι\$úú σ'Ι\$ηΡ\$ δ\$ ηΩ\$so /


Soldering Reflow:

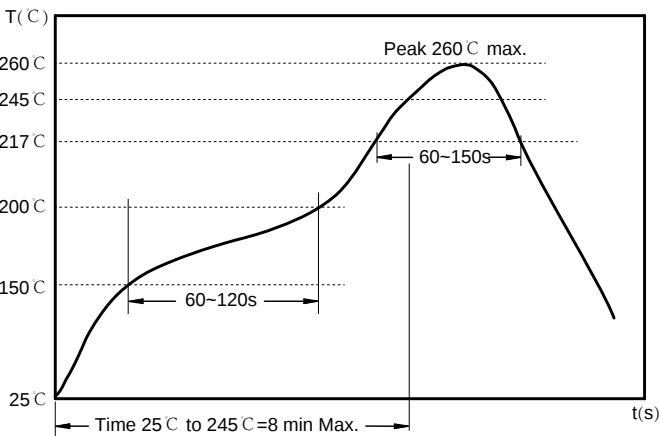

Preheat condition: 150 ~200 °C / 60~120 sec.
 Allowed time above 217 °C : 60~150 sec.
 Max temperature: 260 °C .
 Allowed Reflow time: 3x max.


Packaging Information:

Tape Dimension:

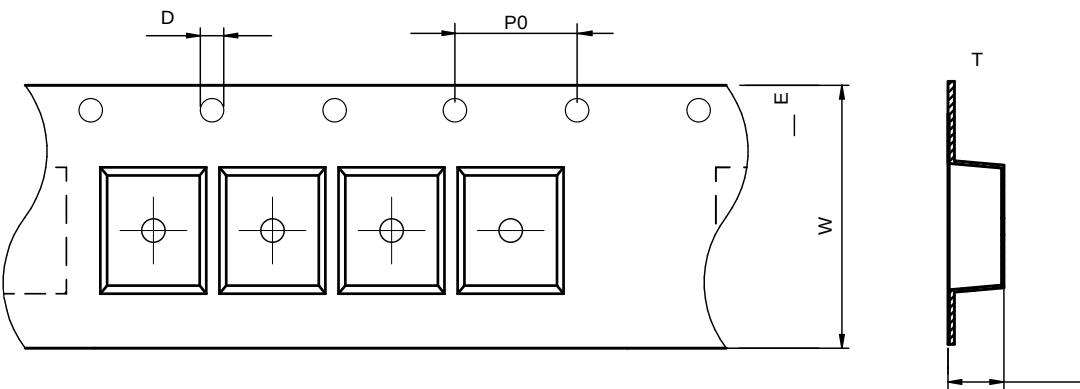


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
ACMA3225 †	2N... †	3 7/8 ± †	1 7/8 ± †	7/8 "4 7/8" †	4 7/8 †	8 7/8 †	2N... ± †	7/8 "1N... ± †	7/16 7/8 „ †

Peel force of top cover tape:

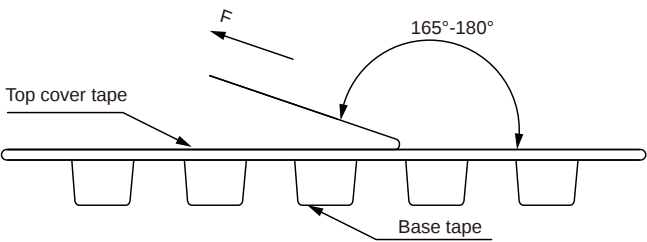


The n orce n op n ove ⊥ n a etwe Δ ⊥ n o >

Reel Dimension: [mm]

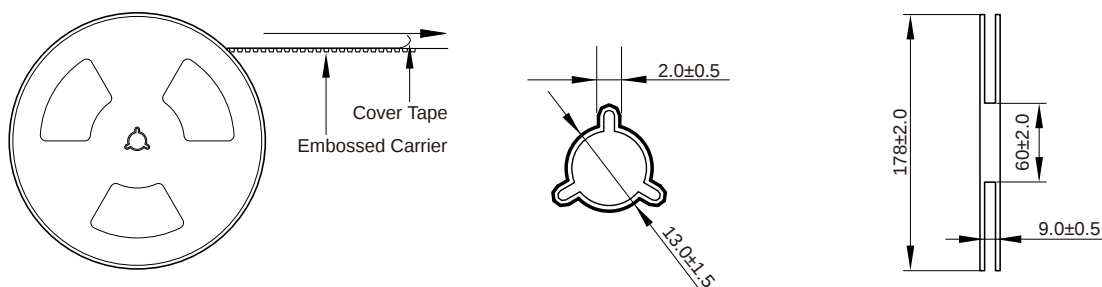

Packaging Quantity:



1500 Pcs/Reel

5 Reel /Inner box(7.5K Pcs)

8 Inner box/Carton box(60K Pcs)

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.