

BCMA Series

Common Mode Filters For Automotive Power Line Size 1211




FEATURES

- High common mode impedance cause excellent noise suppression performance.
- AEC-Q200 qualified
- Operating temperature: -40 to +125 °C
- Quantity: 500pcs


APPLICATIONS

- Measures against common mode noise in power lines for various DC power lines, multimedia devices, and various electronic devices

Dimensions: [mm]



Schematic:






Electrical Properties:

Part No	Impedance Min. (Ω)	Impedance Typ. (Ω)	Test Condition (MHz)	Rated Current Max. (A)	DC Resistance Max. (mΩ)	Rated Voltage Max. (Volts)	Insulation Resistance Min. (MΩ)
BCMA1211-301Y	200	300	100	9.0	4.0	125	10
BCMA1211-501Y	300	500	100	8.0	5.5	125	10
BCMA1211-701Y	500	700	100	9.0	6.0	125	10
BCMA1211-102Y	750	1000	100	6.0	14	125	10
BCMA1211-172Y	1200	1700	100	4.8	12	125	10
BCMA1211-252Y	2200	2500	50	1.8	35	125	10
BCMA1211-272Y	2300	2700	50	1.5	50	125	10

Rated Current: Temperature rise 40°C Typ.

Typical Electrical Characteristics:

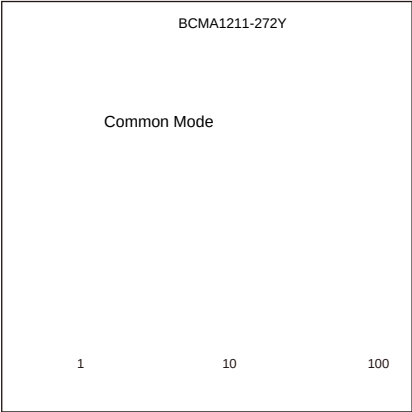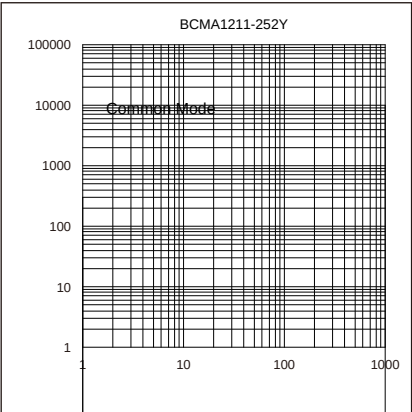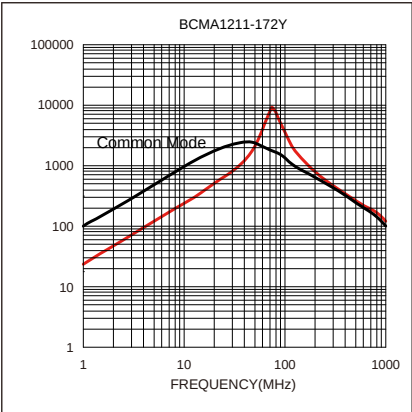

Soldering Reflow:

Packaging Information:


Tape Dimension :

Product Marking:

Marking


Printing Impedance)

Peel force of top cover tape:

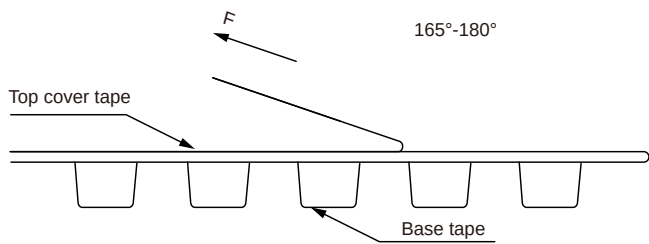


The peel force of top cover tape shall be between 0.10 to 1.17 N

Reel Dimension: [mm]

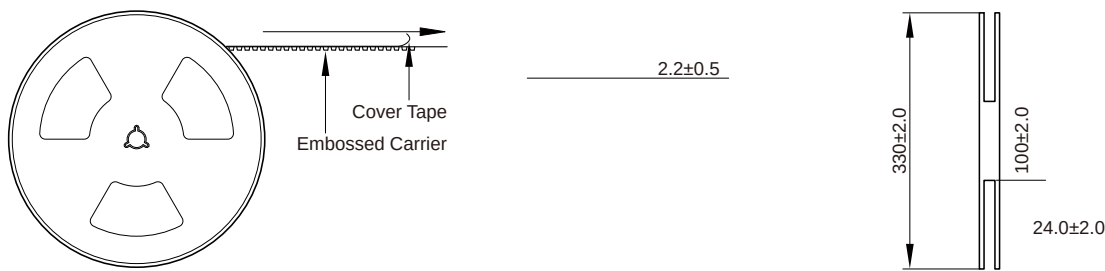

Packaging Quantity:



500 Pcs/Reel

2 Reel /Inner box(1000 Pcs)

3 Inner box/Carton box(3K Pcs)

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- T₂ 0.0712. Be s2 42.57mon403.97 stor:3e5 0 1epa H Max). If the storage period elapses, the soldering of the
-
-