


MDE Series






FEATURES

- High saturation current realized by material properties and structure design.
- Low DC resistance to achieve high conversion efficiency and lower temperature rising.
- Low Profile.
- Magnetically shielded structure to accomplish high resolution in EMC protection.
- Halogen free, Lead Free, RoHS Compliance.
- Operating temperature: -40 to +125 °C
- Quantity: 3000PCS




APPLICATION

- Generic in portable DC to DC converter line.
- Smart phone, PAD
- DC/DC converter
- Thin-type power supply module.



Part No	Inductance @ 1MHz/1V (μ H)	Tolerance	DC Resistance Typ. (m Ω)	DC Resistance Max. (m Ω)	Saturation Current Typ. (A)	Saturation Current Max. (A)	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)
MDE252012-R47M	0.47	$\pm 20\%$	21	25	5.3	4.95	4.60	4.18
MDE252012-R68M	0.68	$\pm 20\%$	29	35	5.0	4.63	3.70	3.36
MDE252012-1R0M	1.00	$\pm 20\%$	41	49	4.4	4.04	3.50	3.18
MDE252012-1R5M	1.50	$\pm 20\%$	64	77	3.2	2.91	2.50	2.27
MDE252012-2R2M	2.20	$\pm 20\%$	85	98	3.0	2.73	2.27	2.06
MDE252012-4R7M	4.70	$\pm 20\%$	196	235	1.9	1.58	1.55	1.40

Temperature rising current will cause the coil temperature approximate $\Delta T 40^{\circ}\text{C}$
 Saturation current will cause to drop approximately 30 %

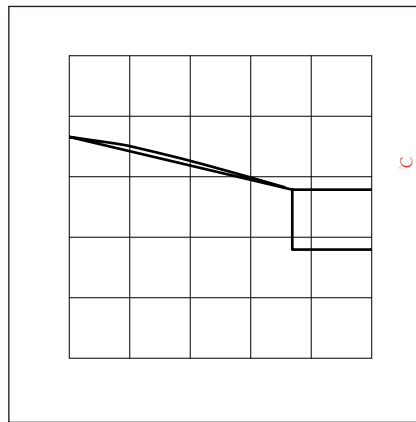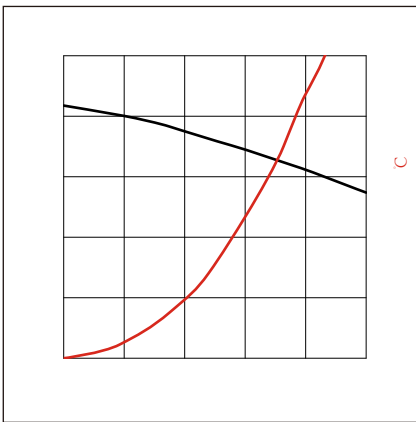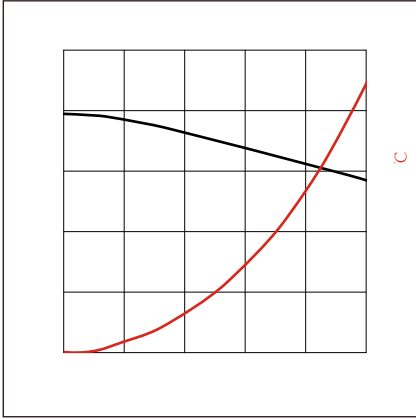

:

