




Wire Wound Molded SMD Power Inductors Size 25201B




- {Ü~ σtúŋotΓÜΩ
- IΩ°'I Ōŋoo\$Ωú PÜX 5/w 'IΩ°'I \$ŸŌŋ\$ΩŌŋ
- ³\$ŋobI PÜX tŌŋŋσΓŌ Ōŋŋσ\$ tΩ\$ Φ\$ŋobI PÜX P\$†‡†°\$ \$ŋŋ Ōŋŋσ\$
- IΩ°'I o\$PŋtŌŋPŋŋŋ
- [§†\$ tŌ Co\$§ tΩ\$ wŋ I { ŌŋΨμPŋtΩú
- hμ\$otΓΩ° ú\$Ψμ\$otúŋo\$ °C LŌŌPŋ\$ŋΩ° σ\$Pŋ ŋ\$Ψμ\$otúŋo\$ oŋσ\$
- vŋtΩΓŋŋ μŋσ

- bŋŋ\$ t / μŋX\$ŋ oσbŋŋ\$Ψ ŋŌŌP La³t
- 5/ 5/ ŌŋŋΦ\$ŋŋŋ

Dimensions: [mm]

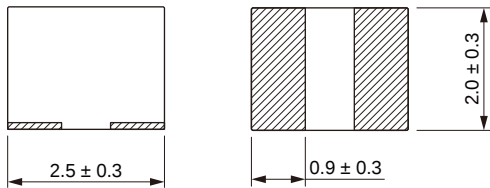

Land Pattern: [mm]




Part No	Inductance @ 1MHz/1V	Tolerance	Current Typ.	Current Max.	Temperature Rise Current Typ.	Temperature Rise Current Max.	DC Resistance Max.

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

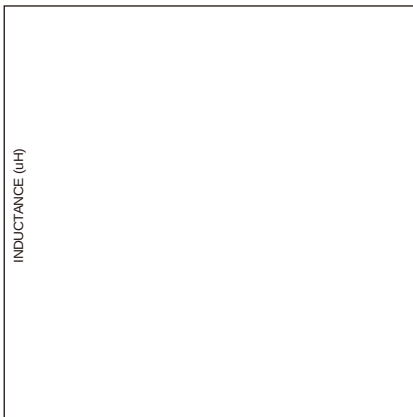

Soldering Reflow:




Packaging Information:

Tape Dimension:

Series	A0 (mm)	B0 (mm)
--------	------------	------------


MDTE25201B

Peel force of top cover tape:

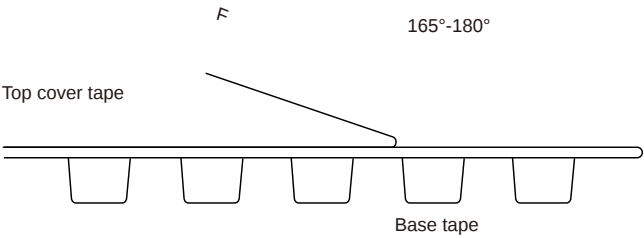

The peel force of top cover tape shall be betw os

Reel Dimension: [mm]

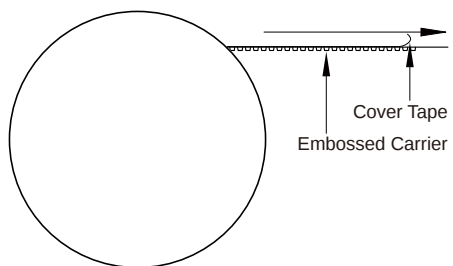

Packaging Quantity: