


SMD High Current Inductor
Size 2015

- I λEK āI-údzNI-ə2y'ÖdzNIUSyú dzLJ ú2 mml !
 - [2Ø t2ääŠă ØλúK bI-ú ØλUS ŘŠăλ3Y
 - [2Ø Ö2US t2ääŠă ØλúK ayîy'Ö2US YI-úŠNIλI-f
 - vdzI-yəúëY mmlLJÖă
-
- I λEK ÖdzNIUSyú 5 / κ5 / Ö2yØŠNIúŠNI
 - [/ ŮtúŠNI

Dimensions: [mm]

Land Pattern: [mm]

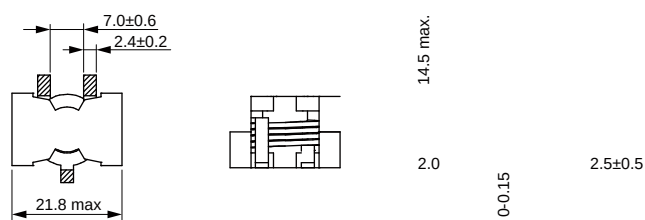

Electrical Properties:

hLJŠNI-əy3 ĆŠYŁJŠNI-údzNISY ππл °C ú2 Ъmnp °C
ĆŠYŁJŠNI-údzNIS wlaŠ / dzNIUSyúY úKŠ I-ÖúdzI-f ØI-fdzŠ 2T 5 / ÖdzNIUSyú ØKŠY'úKŠ úŠYŁJŠNI-údzNIS NIăŠ lă pĆπл °C
{I-údzNI-ə2y' / dzNIUSyú úK I-ú Øλff ŐI-dzăŠ λy1əI-f λyŘdzŐúI-yŎŠ ú2 ŘNI2LJ I-LJLNI2ËλYI-úŠfē HĤĤ:

Typical Electrical Characteristics:

