


thing from general signals to high-speed signals  
AEC-Q200 qualified  
Operating temperature:-55°to +150°C  
Quantity: 10000pcs

Signal line filter for body controls,and car mul media etc.







|      |      |      |     |
|------|------|------|-----|
| 30   | +25% | 0.20 | 300 |
| 60   | +25% | 0.30 | 100 |
| 60   | +25% | 0.25 | 300 |
| 120  | +25% | 0.45 | 80  |
| 120  | +25% | 0.30 | 400 |
| 120  | +25% | 0.30 | 500 |
| 150  | +25% | 0.30 | 100 |
| 220  | +25% | 0.60 | 50  |
| 220  | +25% | 0.40 | 100 |
| 300  | +25% | 0.75 | 50  |
| 300  | +25% | 0.50 | 100 |
| 470  | +25% | 0.65 | 100 |
| 600  | +25% | 0.80 | 80  |
| 600  | +25% | 0.80 | 300 |
| 1000 | +25% | 1.20 | 300 |
| 1000 | +25% | 1.20 | 50  |





## Typical Electrical Characteristics:

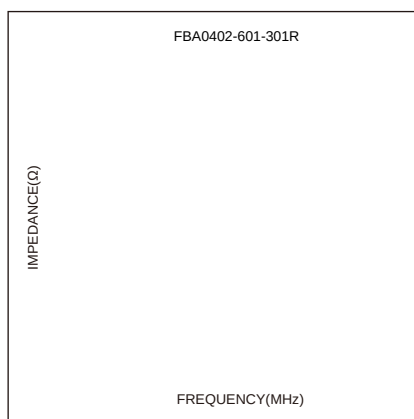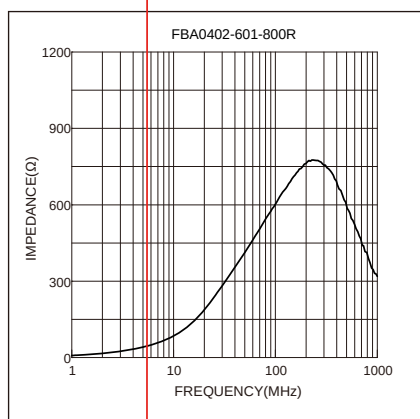

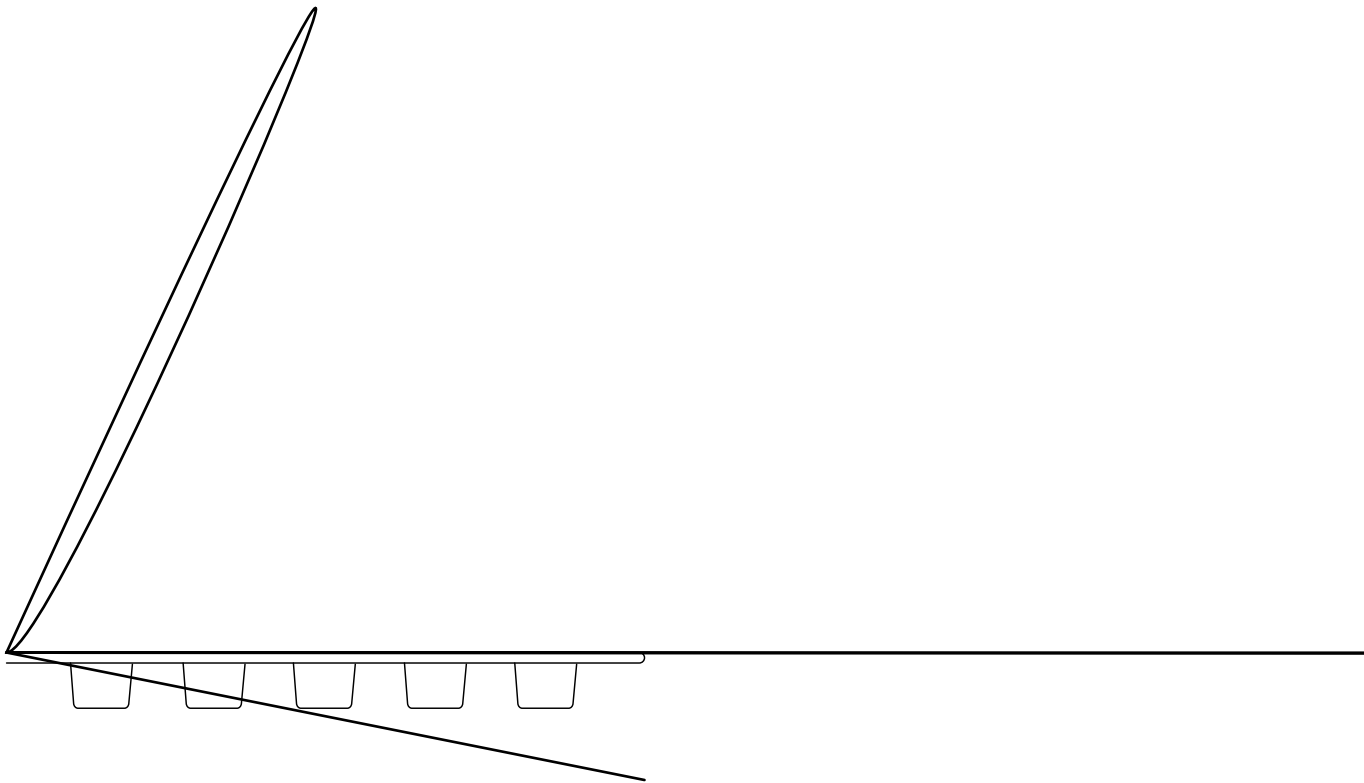

Reel Dimension: [mm]

