


MDTA Series




FEATURES

- / 0Ψμ0σ000\$ 000\$ Ψ0000P 0PP0Xσ 00°0 σ00000Γ00 0000\$000σ
- 3\$0bl P00X 0000σΓ0 0000\$ 000\$ 0\$0bl P00X P\$000°\$ 000\$ 0000\$
- 0 0μ00000bl 000\$ 000\$P\$σ 00°0 0 0000\$ 0 0
- / v 000000\$
- hμ\$00Γ0° 00Ψμ\$0000\$ 00 00° 000000\$σ\$P0 00Ψμ\$0000\$ 000\$
- v00000bl 000σ

APPLICATION

- 5/ 5/ 0000\$000\$σ 000 \$000\$000Ψ\$00 0000° 0Γ00 0bl00\$Ψσ
\$σ000σ 0 Χ000σ000\$P\$
μ00X\$0 Ψ00000σ 0000° 000\$ 0\$00P0Γ00 0P00X\$0σ 005 P0°0Γ0°
- [95 0000

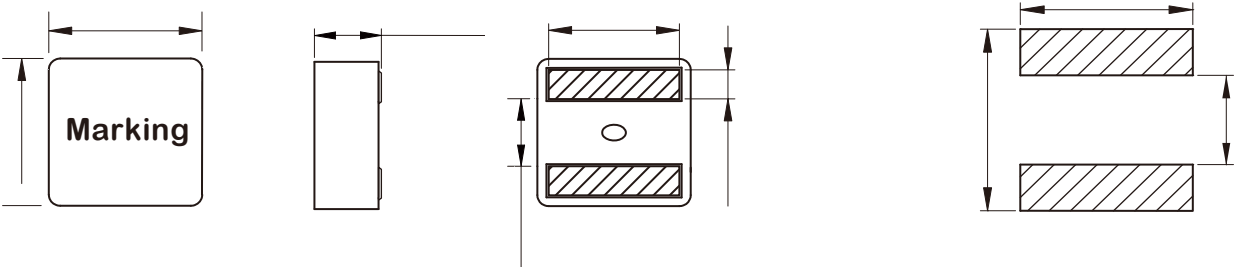

Part No	L@100KHz /0.1V	Tolerance	I _{SAT} Typ.	I _R		R _{DC} Max.
				20°C rise	40°C rise	
a5£! w a						
a5£! w a						
a5£! w a						
a5£! w a						
a5£! a						
a5£! a						
a5£! a						
a5£! a						

