

Flat Wire MK050


Size 5050

FEATURES

- Flat wire coil for low copper losses
- Composite core material allows high saturation currents
- Very low acoustic noise and very low leakage flux noise
- High current
-
-
-

APPLICATION

-
-

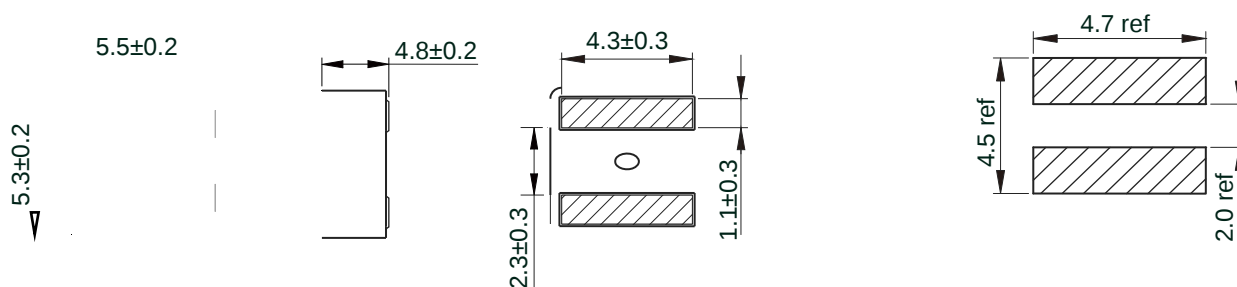

Part No						
MDTA5050-5R6M	5.6	$\pm 20\%$	8.6	5.3	7.2	24.20
MDTA5050-6R8M	6.8	$\pm 20\%$	7.8	4.8	6.4	28.60
MDTA5050-8R2M	8.2	$\pm 20\%$	7.2	4.6	6.1	32.50
MDTA5050-100M	10	$\pm 20\%$	6.5	3.8	5.0	43.00
MDTA5050-150M	15	$\pm 20\%$	3.7	3.0	3.9	76.70

