

## WWCIHC Series

SMD Wire Wound Ceramic Inductor

Size 0402



### CHARACTERISTICS


- Wire wound with high Q and high SRF
- More stable due to ceramic design
- Small size and small tolerance available
- Quantity: 10000pcs

### APPLICATION

- HF application

Dimensions: [mm]

Land Pattern: [mm]



Electrical Properties:




|  |       |             |
|--|-------|-------------|
|  | 0.080 | 5.40        |
|  | 0.065 | 5.40        |
|  | 0.070 | <b>5.00</b> |
|  | 0.080 |             |



## Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

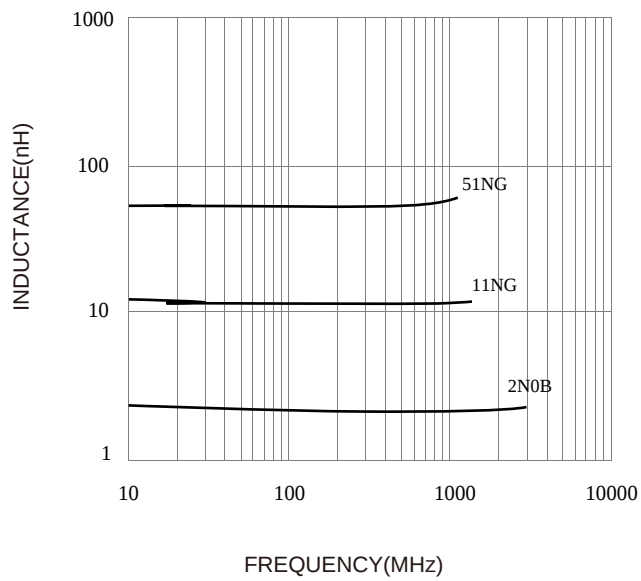

Temperture Rise VS. Frequency Characteristics:

